




TF2509 ASSEMBLY INSTRUCTIONS

	 ①×1	 ②×4	 ③×1	 M8x20mm ④×20	 φ20x8 ⑤×20
	 5# ⑥×1	 φ 8.3 ⑦×20	 M8 ⑧×1		

Reminders:

A. Not to assemble the base to the top to flip it over by landing the top on the floor. Need to place the top onto the base to assemble.

B. If you need to place the table to desired location after all set up, never move the table when it is open. Always move the table when it is closed and locked.

C. Hold the extension metal frame only and hold the main top by the team to raise up the table for moving. It is a more than 200 KG table. 4 people is preferable.


D. Never hold the top and extensions in one hand to raise up to move, as this will cause the extension cracks.

E. Always lock after open or after close for daily use. Always need to unlock before trying to rotate to open or rotate to close.

F. Always rotate the main top to open and close. Not to push or pull the extensions to open or to close, as this will cause the extensions dislocate.


G. Keep the wrench and socket in tool box for easily reaching out for adjustments after some while.

H. Follow the step 3 aligning way and high adjusting way to adjust if there will be gaps or leveling issues after the daily uses.

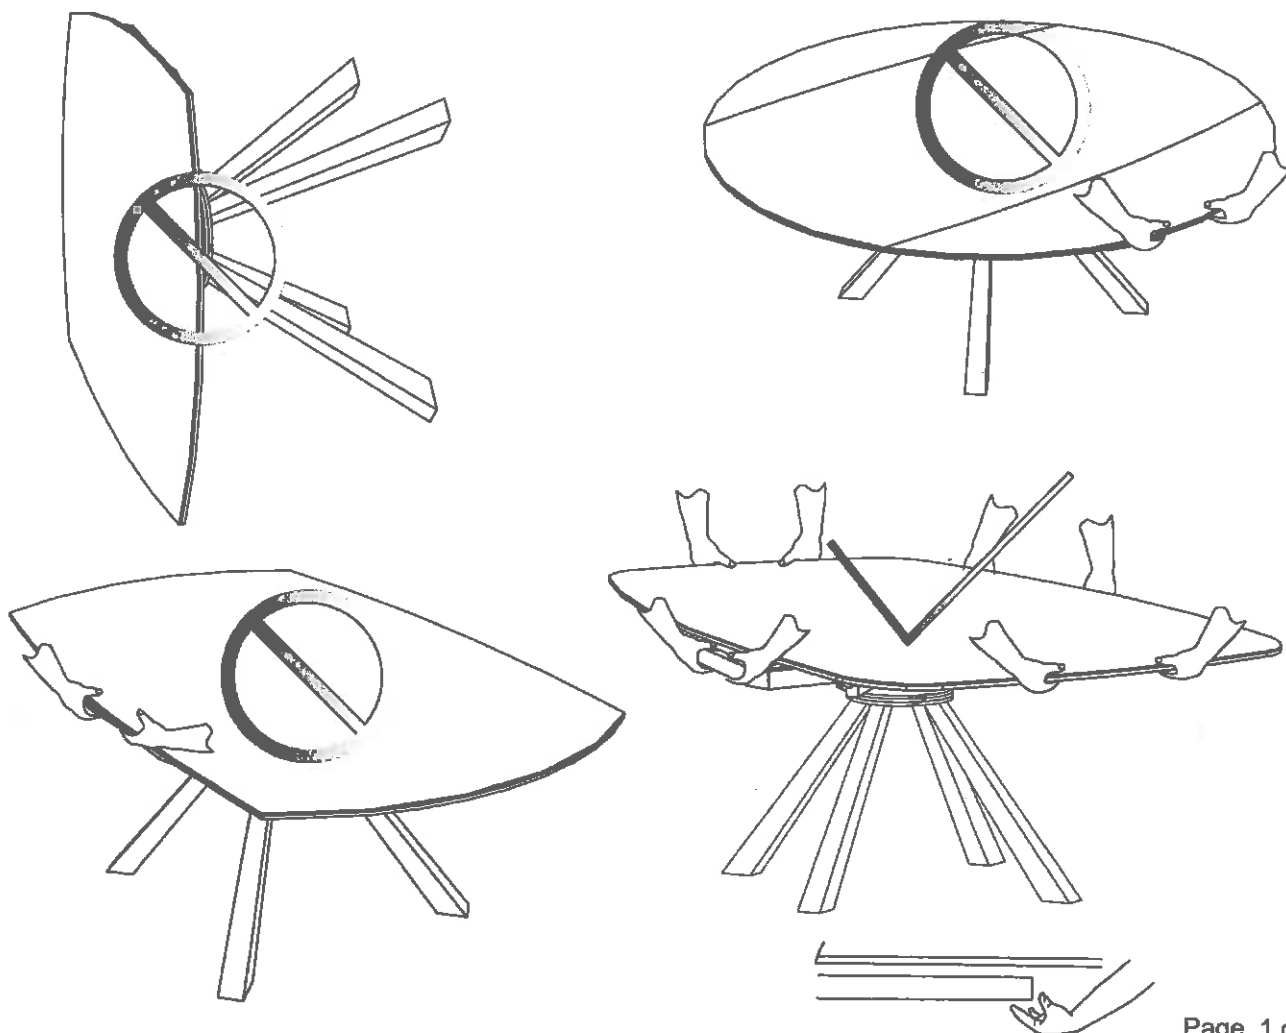


TF2509 ASSEMBLY INSTRUCTIONS

STEP 1


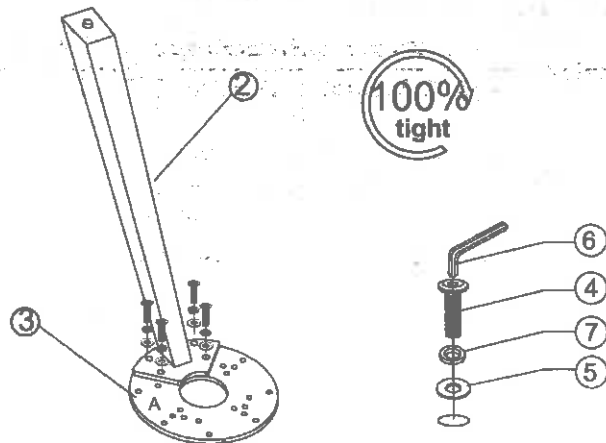


Ensure that the side with "A" is facing upwards during assembly.

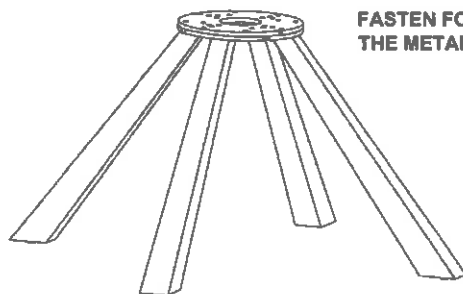


FASTEN FOUR LEGS TO THE METAL PLATE

STEP 2

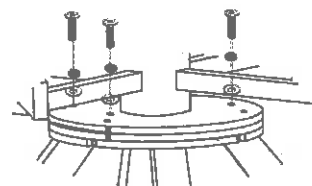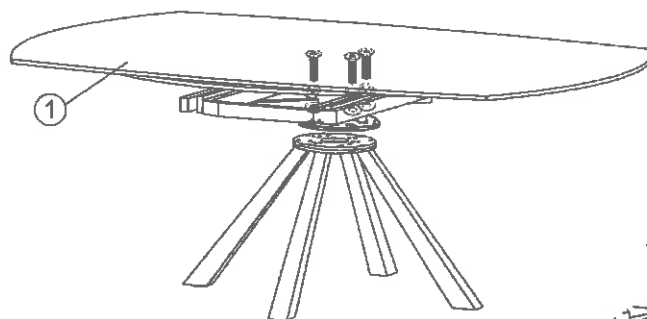


Align the arrows on brackets to assemble the mechanism frame to the base.



TF2509 ASSEMBLY INSTRUCTIONS

STEP 3

unlock the brake and rotate the main top to extend the extensions for more seatings. Lock the brake before using. Unlock the brake and rotate the main top to restore the extensions back. Lock the brake before using.

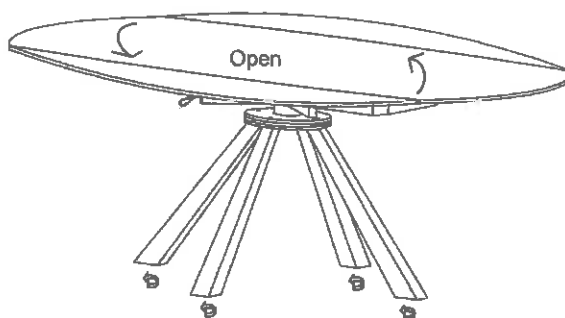

ADJUST THE GLIDES IF NEEDED

Remarks:

In case the table tops are not leveled, Using the socket supplied (part 8) loosen the nut under the track, and adjust the height by turning the thumb nut. Turn clockwise to raise the leaf and anti clockwise to lower the leaf position. Once the table top is level re tighten the nut under the track. In case the extensions are not align to the main top, or gaps between the top and extensions, use the socket to loose the nuts underneath the extension frame, slightly rotate the main top and align the top and extensions. Fasten the nuts after top and extensions are aligned.

