
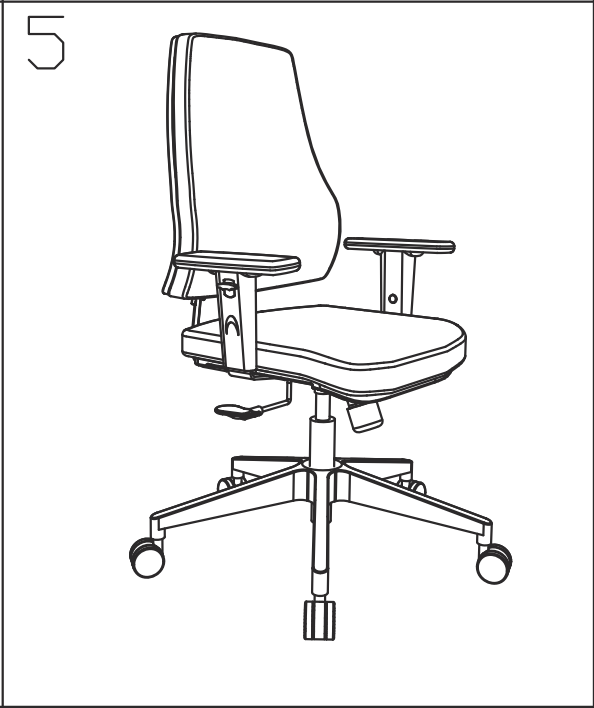
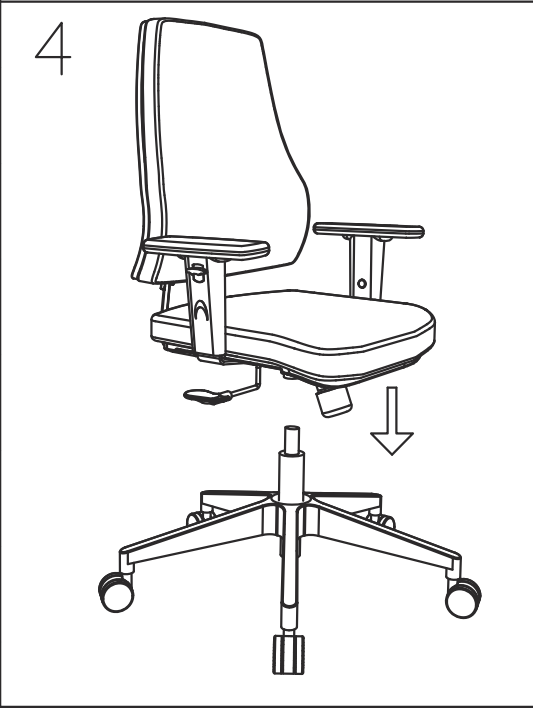
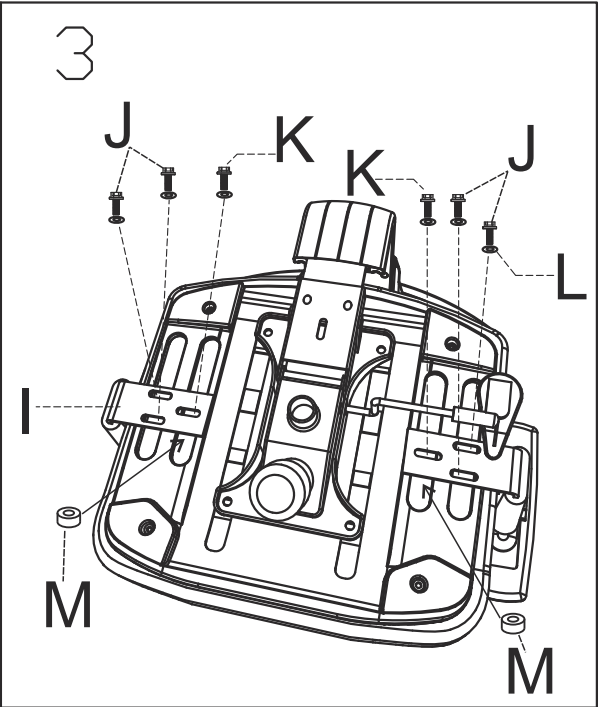
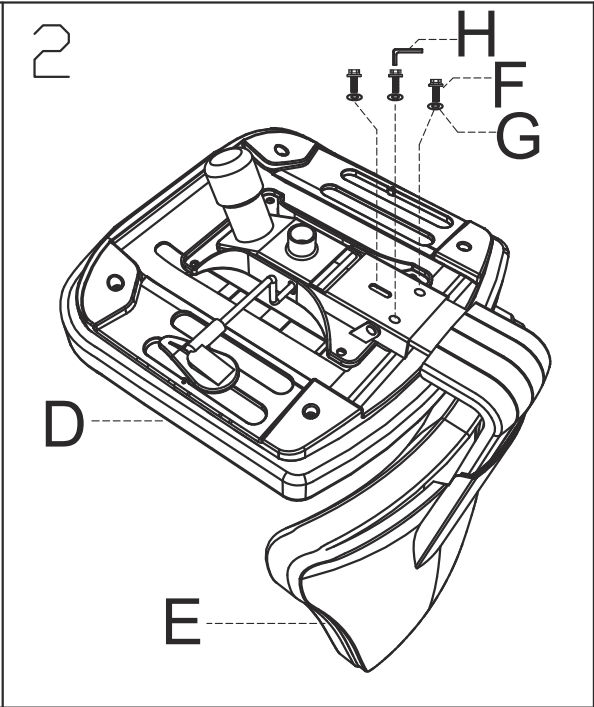


PART		Qty.
A		5
B		1
C		1
D		1
E		1
F	 M8x16	3
G	 Ø9x19	3
H		1
I		2
J	 M6x30	4
K	 M6x35	2
L	 Ø7.5x15	6
M	 15mm	2

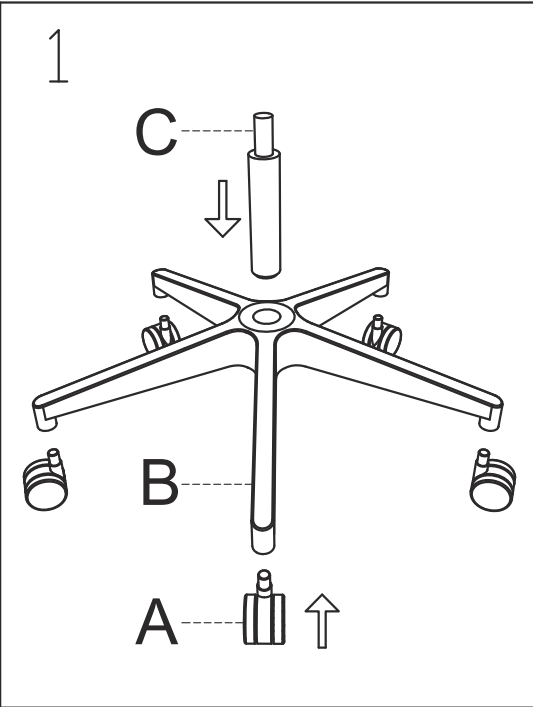

Back height adjustment:

To change the back height (①), lift up the back by putting your force at the bottom of the back, then adjust the back height step by step.

Only the back reach the highest position, then can pull down the back to the first position(lowest position).


Armrest adjustment (②):

To rise up or lower down the armrest, pull up the button on the armrest and move up or down.

Seat height adjustment:

To raise the seat height, remove weight from the seat and pull up on the height adjustment lever (③), release the lever when reaching the desired position.

To lower the seat height, while seated, pull up slowly on the height adjustment lever until the seat is at the desired height.

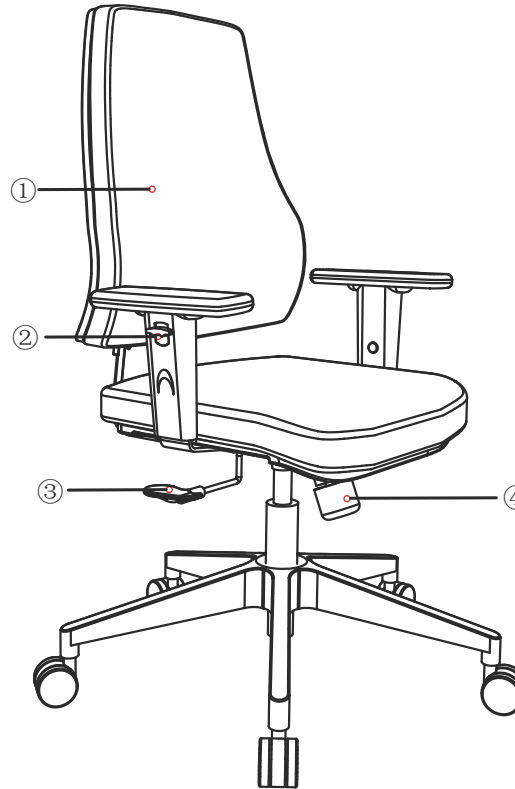

Backrest angle adjustment:

To change backrest's position, pull out the adjustment lever (③) to unlock, then can lie backwards and tilting.

When the backrest go back to the original position, push in the adjustment lever to lock.

Tilt tension adjustment:

To adjust the seat tilt tension, turn the tension adjustment knob (④) on the mechanism to desired tension, turn clockwise or anticlockwise. Clockwise to make it hard.

Anticlockwise to make it easy.